




Peristaltic hose pump

Technical data

Technical data		Driver & Condition	
Flow Rate	10 m ³ /h	Coupling type	Direct Coupling
Total head	8 bar	Driver	Electromotor 4 KW
Direction of Rotation	CW/CCW	Maximum suction lift	4 m
Speed of Rotation	56 rpm	Speed Reducer	Gearbox
Suction	DIN2543	Max.solid content	2.5 mm compressible 6 mm incompressible
Discharge	DIN2543	Inverter	Desired
Casing	ST37(Epoxy coated)	Operating Condition	
Hose	CSM (Hypalon)	Operation Temp.	Up to 130 °C
Rotor	ST37(Epoxy coated)	ATEX	N/A
Connection	Stainless steel 316		
Shaft	1.6511		

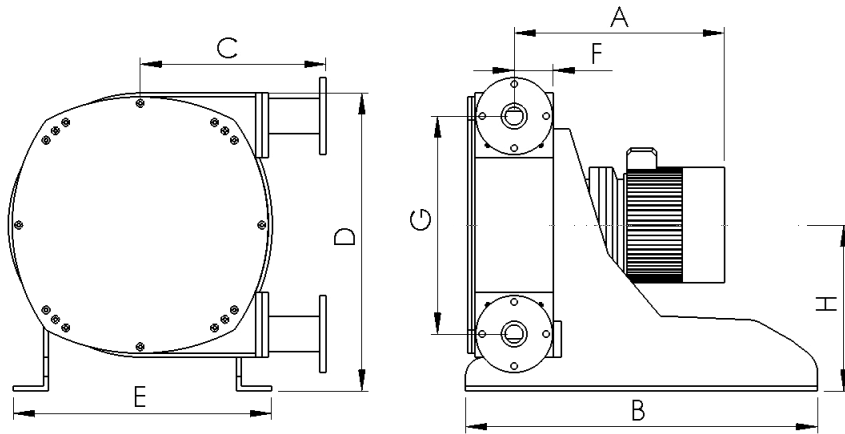

Connector Size	ANSI 150#	EN DIN	JIS
PA10010.MH	1 1/2"	40 mm	40 mm

Type	A	B	C	D	E	F	G	H
PA10010.MH (mm)	450	700	400	790	580	55	634	440