


Technical data

Technical data		Driver & Condition	
Flow Rate	150 L/h	Coupling type	Direct Coupling
Total head	10 bar	Driver	Electromotor 0.75 KW
Direction of Rotation	CW/CCW	Maximum suction lift	3 m
Speed of Rotation	50 rpm	Speed Reducer	Bevel Gearbox
Suction	DIN2566	Max.solid content	4 mm compressible 1.5 mm incompressible
Discharge	DIN2566	Inverter	Desired
Casing	PVC coated ST37	Operating Condition	
Hose	NR+EPDM	Operation Temp.	Up to 100 °C
Rotor	ST37/GTS-55	ATEX	N/A
Connection	PVC coated st37		
Shaft	1.6582		

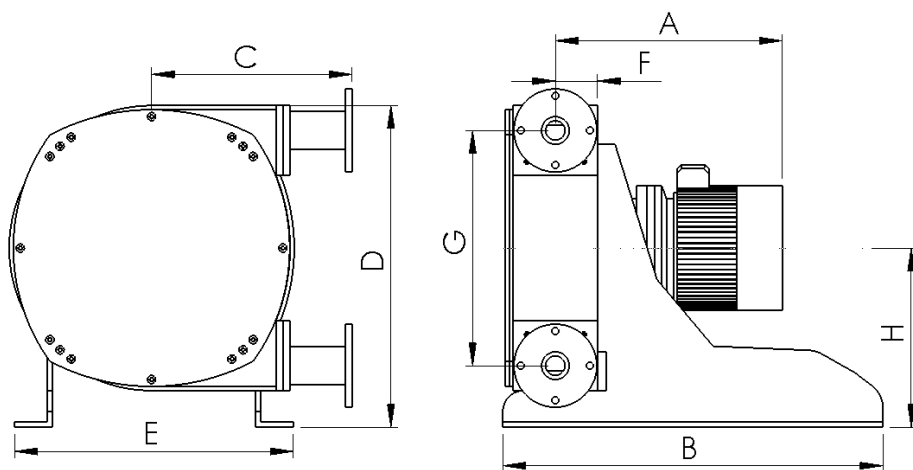

Connector Size	ANSI 150#	EN DIN	JIS
PA150010.LH	1/2"	15 mm	15 mm

Type	A	B	C	D	E	F	G	H
PA150010.LH (mm)	300	400	150	400	320	45	320	240