


Technical data

Technical data		Driver & Condition	
Flow Rate	15 m ³ /h	Coupling type	Direct Coupling
Total head	6 Up to 12 bar	Driver	Electromotor 4 KW
Direction of Rotation	CW/CCW	Maximum suction lift	4 m
Speed of Rotation	63 rpm	Speed Reducer	Gearbox
Suction	DIN2543	Max.solid content	4 mm compressible 10 mm incompressible
Discharge	DIN2543	Inverter	Desired
Casing	ST37/GG-20	Operating Condition	
Hose	NR+EPDM	Operation Temp.	Up to 80 °C
Rotor	ST37/GTS-55	ATEX	N/A
Connection	Stainless Steel		
Shaft	1.6511		

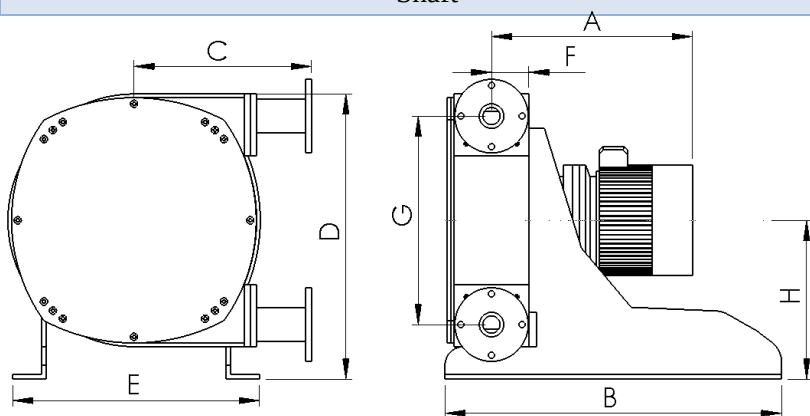

Connector Size	ANSI 150#	EN DIN	JIS
PA15010.MH	2"	50 mm	50 mm

Type	A	B	C	D	E	F	G	H
P15.M (mm)	500	800	500	950	650	65	720	550