




Peristaltic pump

Technical data

Technical data		Driver & Condition	
Flow Rate (Min)	10 L/h	Coupling type	Direct Coupling
Flow Rate (Max)	60 L/h		
Total head	0.5 – 2 bar	Driver	Steper motor
Direction of Rotation	CW/CCW	Maximum suction lift	0.5 m
Speed of Rotation	100 rpm	Speed Reducer	Electronic Volume
Volume determination	✓	Input Voltage	220 V
Delay time determination	✓	Inverter	-----
Casing	PP	Operating Condition	
Hose	Silicon/Norprene	Operation Temp.	Up to 100 °C
Rotor	ST37 (Coated)	ATEX	N/A
Flow rate	Variable		
Programmable	✓		

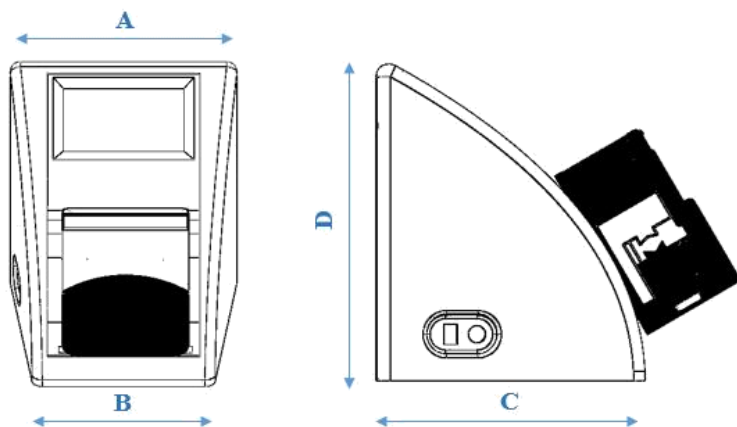

Type	A	B	C	D
PA2000.LMD (mm)	190	150	200	220