


Technical data

Technical data		Driver & Condition	
Flow Rate	25 m ³ /h	Coupling type	Direct Coupling
Total head	7 bar	Maximum suction lift	10 m
Direction of Rotation	CW/CCW	Max.solid content	16 mm compressible 6 mm incompressible
Speed of Rotation	60 rpm	Leakage sensor	✓
Suction	DN2543	Pressure sensor	N/A
Hose material	Natural rubber	Electromotor	5.5 KW
Hose nominal ID	65 mm	Gearbox	Helical bevel
Discharge	DN2543	Run mode	Dry
Casing	ST37/GG-20	Operating Condition	
Rotor	ST37/GTS-55	Operation Temp.	Up to 80 °C
Connection	ST37	ATEX	N/A
Shaft	1.6582		

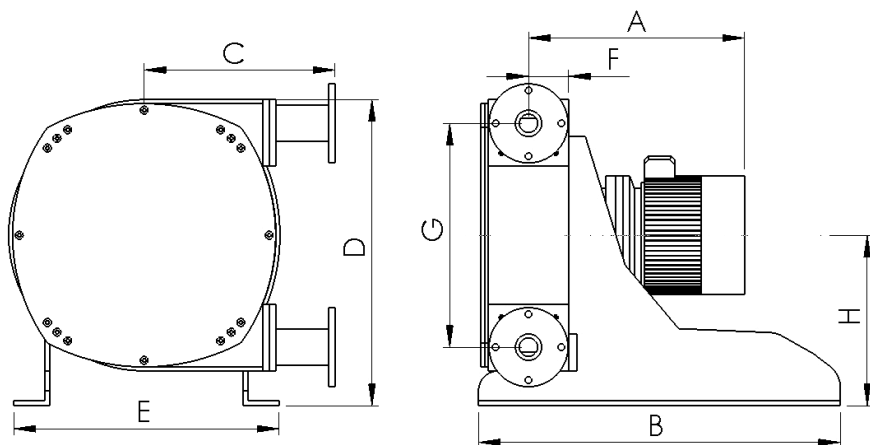

Connector Size	ANSI 150#	EN DIN	JIS
PA25010.MH	3"	80 mm	80 mm

Type	A	B	C	D	E	F	G	H
PA25010.MH (mm)	800	900	700	1120	950	110	900	620