


Technical data

Technical data		Driver & Condition	
Flow Rate	3 m ³ /h	Coupling type	Direct Coupling
Total head	6 bar	Driver	Electromotor 3 KW
Direction of Rotation	CW/CCW	Maximum suction lift	3 m
Speed of Rotation	63 rpm	Speed Reducer	Bevel Gearbox
Suction	DIN2566	Max.solid content	2.5 mm compressible 1 mm incompressible
Discharge	DIN2566	Inverter	Desired
Casing	coated ST37	Operating Condition	
Hose	NR	Operation Temp.	Up to 80 °C
Rotor	ST37/GTS-55	ATEX	N/A
Connection	coated st37		
Shaft	1.1191		

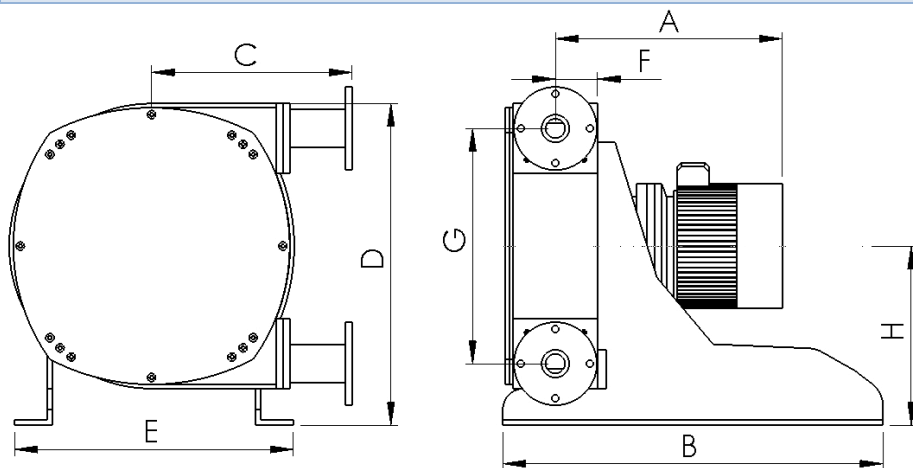

Connector Size	ANSI 150#	EN DIN	JIS
PA3010.MH	2"	50 mm	50 mm

Type	A	B	C	D	E	F	G	H
PA3010.MH (mm)	200	500	300	450	400	65	350	240