


Technical data

Technical data		Driver & Condition	
Flow Rate	350 L/h	Coupling type	Direct Coupling
Total head	4 bar	Driver	Electromotor 1.5 KW
Direction of Rotation	CW/CCW	Maximum suction lift	3 m
Speed of Rotation	65 rpm	Speed Reducer	Bevel Gearbox
Suction	DIN2566	Max.solid content	2.5 mm compressible 1 mm incompressible
Discharge	DIN2566	Inverter	Desired
Casing	coated ST37	Operating Condition	
Hose	EPDM	Operation Temp.	Up to 80 °C
Rotor	ST37/GTS-55	ATEX	N/A
Connection	coated st37		
Shaft	1.1191		

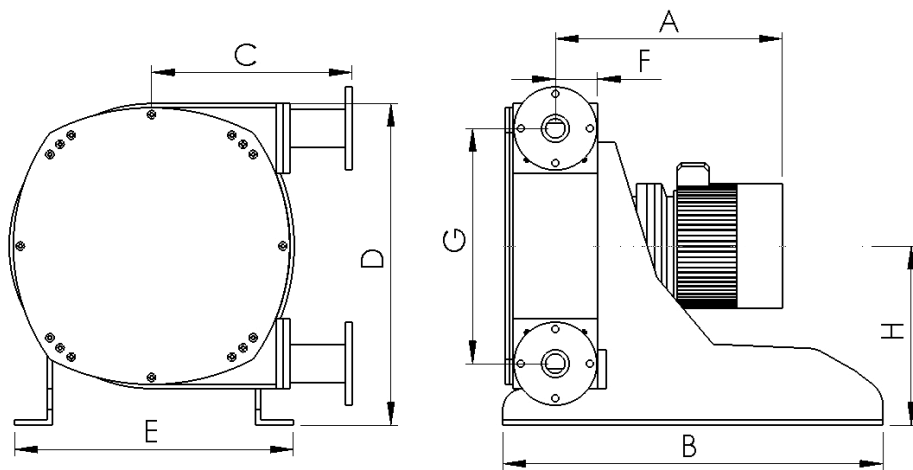

Connector Size	ANSI 150#	EN DIN	JIS
PA350010.LH	1"	30 mm	30 mm

Type	A	B	C	D	E	F	G	H
PA350010.LH (mm)	250	400	280	480	500	45	350	240