




Technical data

Technical data		Driver & Condition	
Flow Rate	45 m ³ /h	Coupling type	Direct Coupling
Total head	10 bar	Driver	Electromotor 11 KW
Direction of Rotation	CW/CCW	Maximum suction lift	8 m
Speed of Rotation	56 rpm	Speed Reducer	Bevel Gearbox
Suction	DIN2566	Max.solid content	25 mm compressible 15 mm incompressible
Discharge	DIN2566	Inverter	N/A
Casing	ST37/GG-20	Operating Condition	
Hose	Natural rubber	Operation Temp.	Up to 100 °C
Rotor	ST37/GTS-55	ATEX	N/A
Connection	Stainless steel 316L		
Shaft	1.6582		

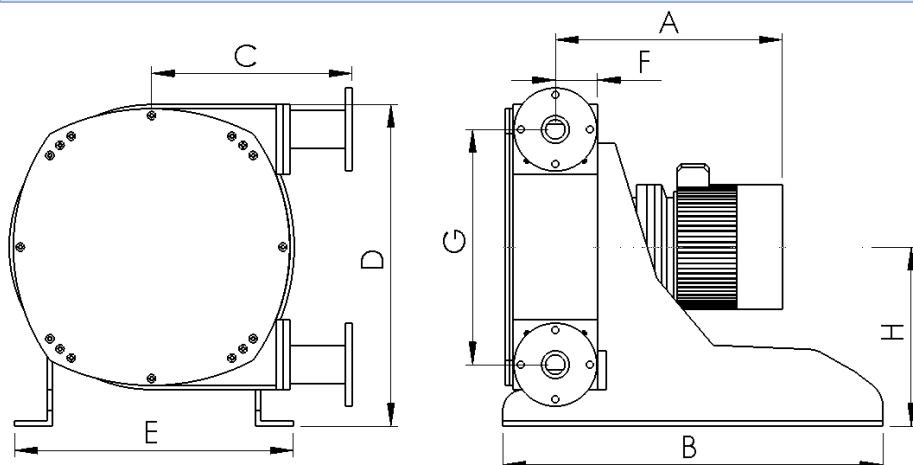

Connector Size	ANSI 150#	EN DIN	JIS
PA45010.MH	3"	80 mm	80 mm

Type	A	B	C	D	E	F	G	H
PA45010.MH (mm)	500	1100	660	1200	800	65	1040	600