


Technical data

Technical data		Driver & Condition	
Flow Rate	500 L/h	Coupling type	Direct Coupling
Total head	2 bar	Driver	Electromotor 0.75 KW
Direction of Rotation	CW/CCW	Maximum suction lift	2 m
Speed of Rotation	56 rpm	Speed Reducer	Gearbox
Suction	DIN2543	Max.solid content	2.5 mm compressible 6 mm incompressible
Discharge	DIN2543	Inverter	Desired
Casing	ST37(Epoxy coated)	Operating Condition	
Hose	NBR	Operation Temp.	Up to 85 °C
Rotor	ST37(Epoxy coated)	ATEX	N/A
Connection	Stainless steel 316		
Shaft	1.6511		

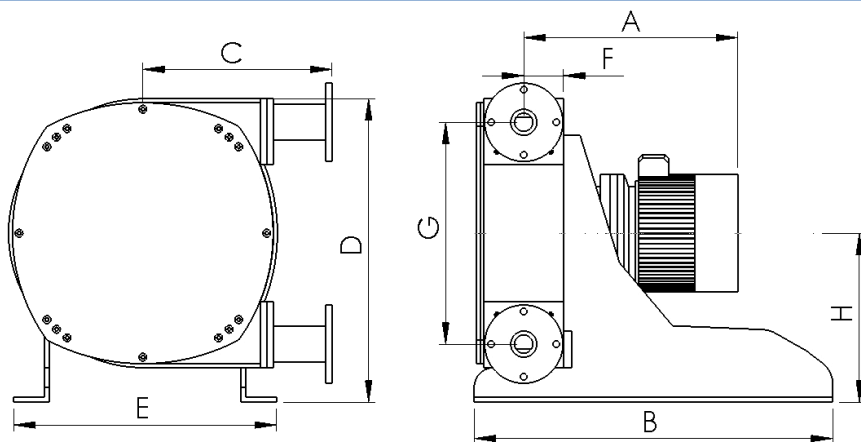

Connector Size	ANSI 150#	EN DIN	JIS
PA500010.LH	1 "	25 mm	25 mm

Type	A	B	C	D	E	F	G	H
PA500010.LH (mm)	300	350	170	350	345	45	275	200