


Technical data

Technical data		Driver & Condition	
Flow Rate	50 L/h	Coupling type	Direct Coupling
Total head	7 bar	Driver	Electromotor 1.5 KW
Direction of Rotation	CW/CCW	Maximum suction lift	8 m
Speed of Rotation	63 rpm	Speed Reducer	Bevel Gearbox
Suction	DIN2566	Max.solid content	3 mm compressible 1 mm incompressible
Discharge	DIN2566	Inverter	INOMAX
Casing	Coated Metal	Operating Condition	
Hose	EPDM	Operation Temp.	Up to 100 °C
Rotor	Coated metal	ATEX	N/A
Connection	UPVC		
Shaft	1.6582		

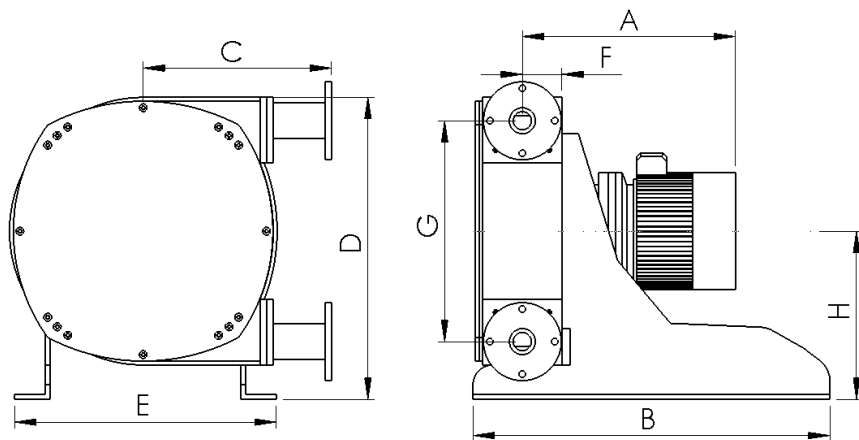

Connector Size	ANSI 150#	EN DIN	JIS
PA50010.LH	1/2"	13 mm	13 mm

Type	A	B	C	D	E	F	G	H
PA50010.LH (mm)	200	400	150	250	250	45	165	130