


Technical data

Technical data		Driver & Condition	
Flow Rate	60 m ³ /h	Coupling type	Direct Coupling
Total head	16 bar	Driver	Electromotor 15 KW
Direction of Rotation	CW/CCW	Maximum suction lift	8 m
Speed of Rotation	65 rpm	Speed Reducer	Gearbox
Suction	DIN2543	Max.solid content	10 mm compressible 20 mm incompressible
Discharge	DIN2543	Inverter	Desired
Casing	ST37/GG-20	Operating Condition	
Hose	NR+EPDM	Operation Temp.	Up to 100 °C
Rotor	ST37/GTS-55	ATEX	N/A
Connection	ST37 Coated		
Shaft	1.6582		

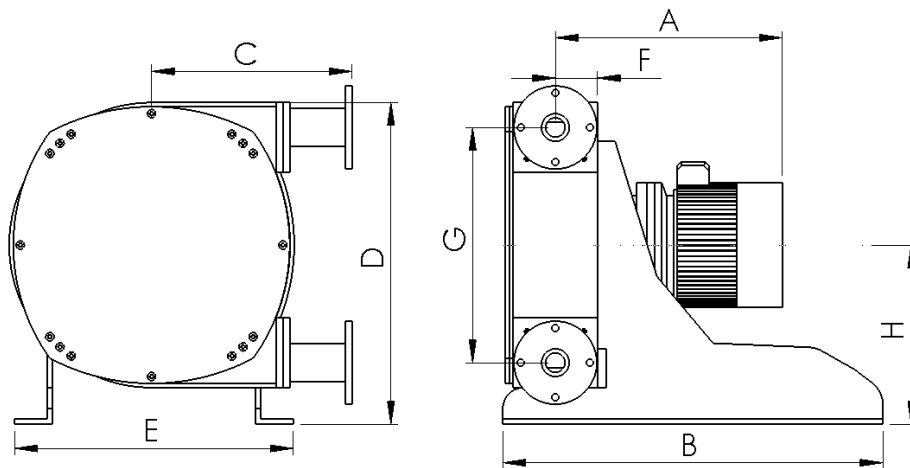

Connector Size	ANSI 150#	EN DIN	JIS
PA60010.MH	4"	100 mm	100 mm

Type	A	B	C	D	E	F	G	H
PA60010.MH (mm)	750	1500	660	1620	1350	135	1256	920